
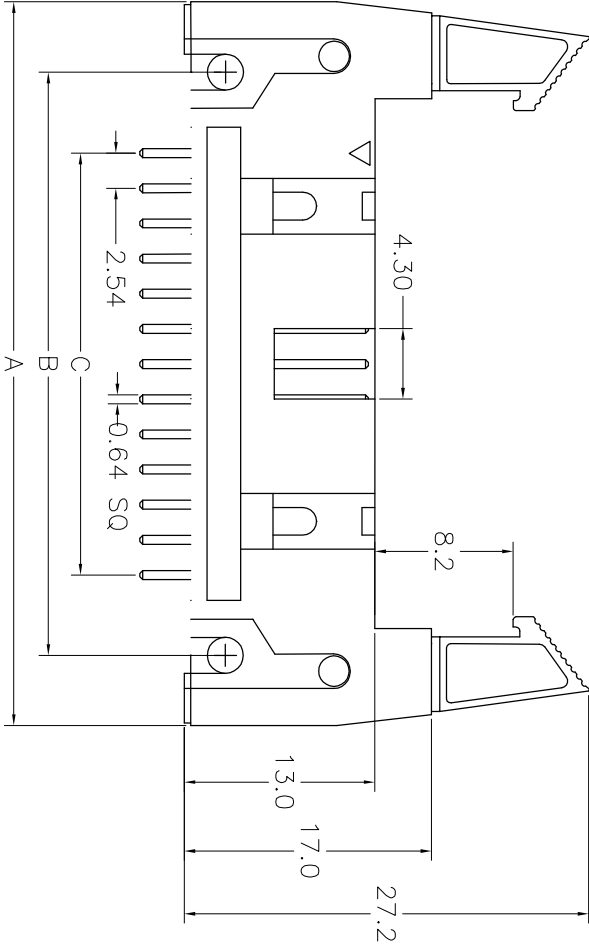




2.54mm Ejector Header, Straight

SPECIFICATIONS

Current Rating : 3AMP
Operation Temperature: -40°C to +105°C
Contact Resistance : 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : AC 1000V
Insulator Material : Polyester(UL94V-0)
Standard: PBT
Contact Material : Brass
Contact plating : Au or Sn over 50u”
Ni

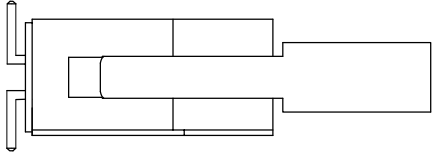

No. of Contacts	A	B	C
10	32.00	21.84	10.16
14	37.08	26.92	15.24
16	39.62	29.46	17.78
20	44.70	34.54	22.86
26	52.32	42.16	30.48
30	57.40	47.24	35.56
34	62.48	52.32	40.64
40	70.10	59.94	48.26
50	82.80	72.64	60.96
60	95.50	85.34	73.66
64	100.58	90.42	78.74

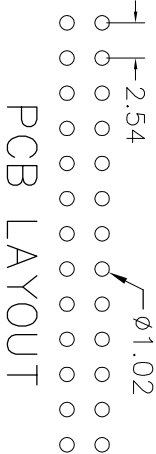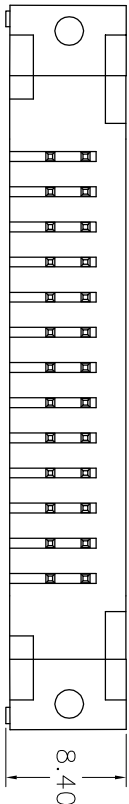

深圳市永连旺电子有限公司
TEL: 0755-27367782
FX: 27382610

X: ±0.35 X.X: ±0.25 X.XX: ±0.20 X.XXX: ±0.15	品名规格	2.54 牛角 xxP 180度
	客户品号	

UNIT: mm	版本	制图	审核	核准
Size: A4 Scale: 1:1	A/0	陈艳	Wang	
				17-6-25

客户