
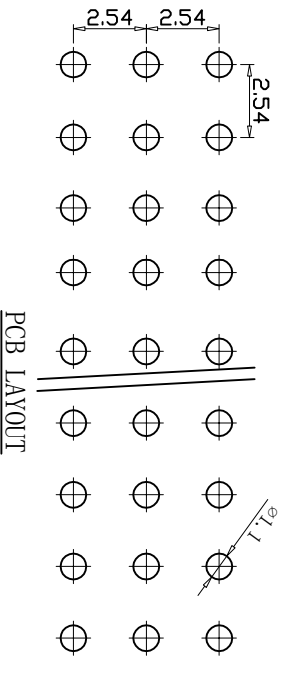
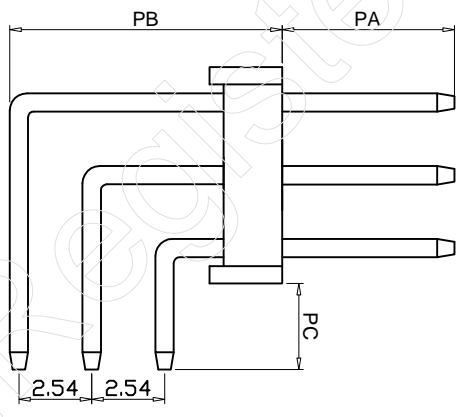
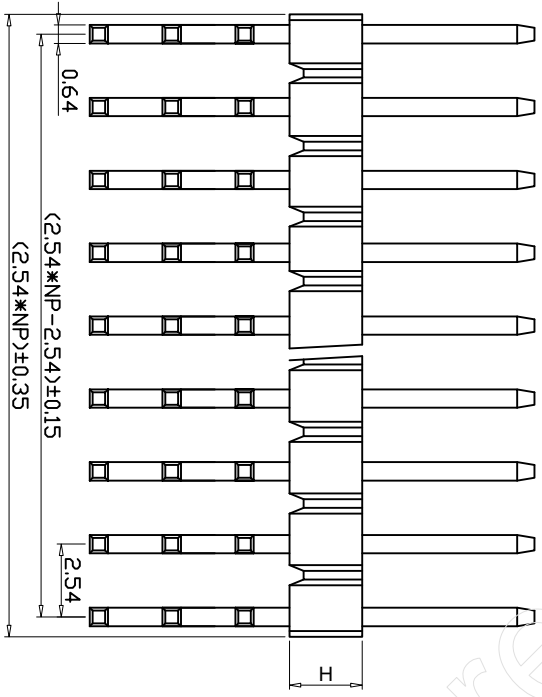


版本 REV	编号 ECON NO.	位置 LOCATIONS	变更内容 DESCR IPTION	日期 DATE	变更人 DESIGN
A					

Specifications

1. Current Rating: 3Amps
2. Insulation Resistance: 5000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 20 mΩ max.
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Brass
7. Insulation Material: Asfollows
8. Plated: Asfollows

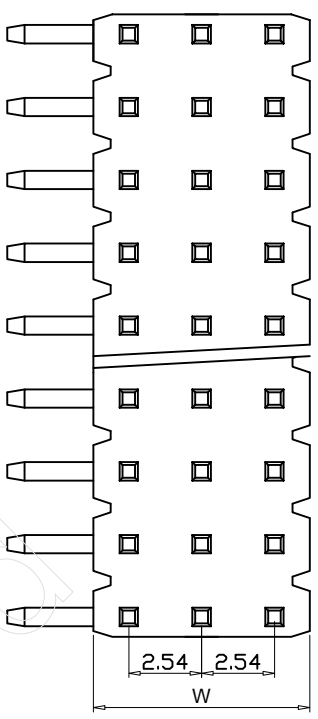

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGLE	ANGLE
LINER	0.°	±2.0°
0. ±0.3	0.°	±1.0°
.00 ±0.2	0.°	±0.5°
.000 ±0.1	0.°	

品名 TITLE:	PR2.54#1 9P 3AW2三排材料	日期 (Date):	
料号 (P/N):		审核 (CHKD):	
文件编号 (D/N):		核准 (APPD):	
比例 (SCALE):	1:1	单位 (UNIT):	mm
		张数 (SHEET):	XOFEX
		日期 (Date):	
		日期 (Date):	
		日期 (Date):	
		比例 (SIZE):	A4
		类别 (TYPE):	

深圳市永连旺电子有限公司